
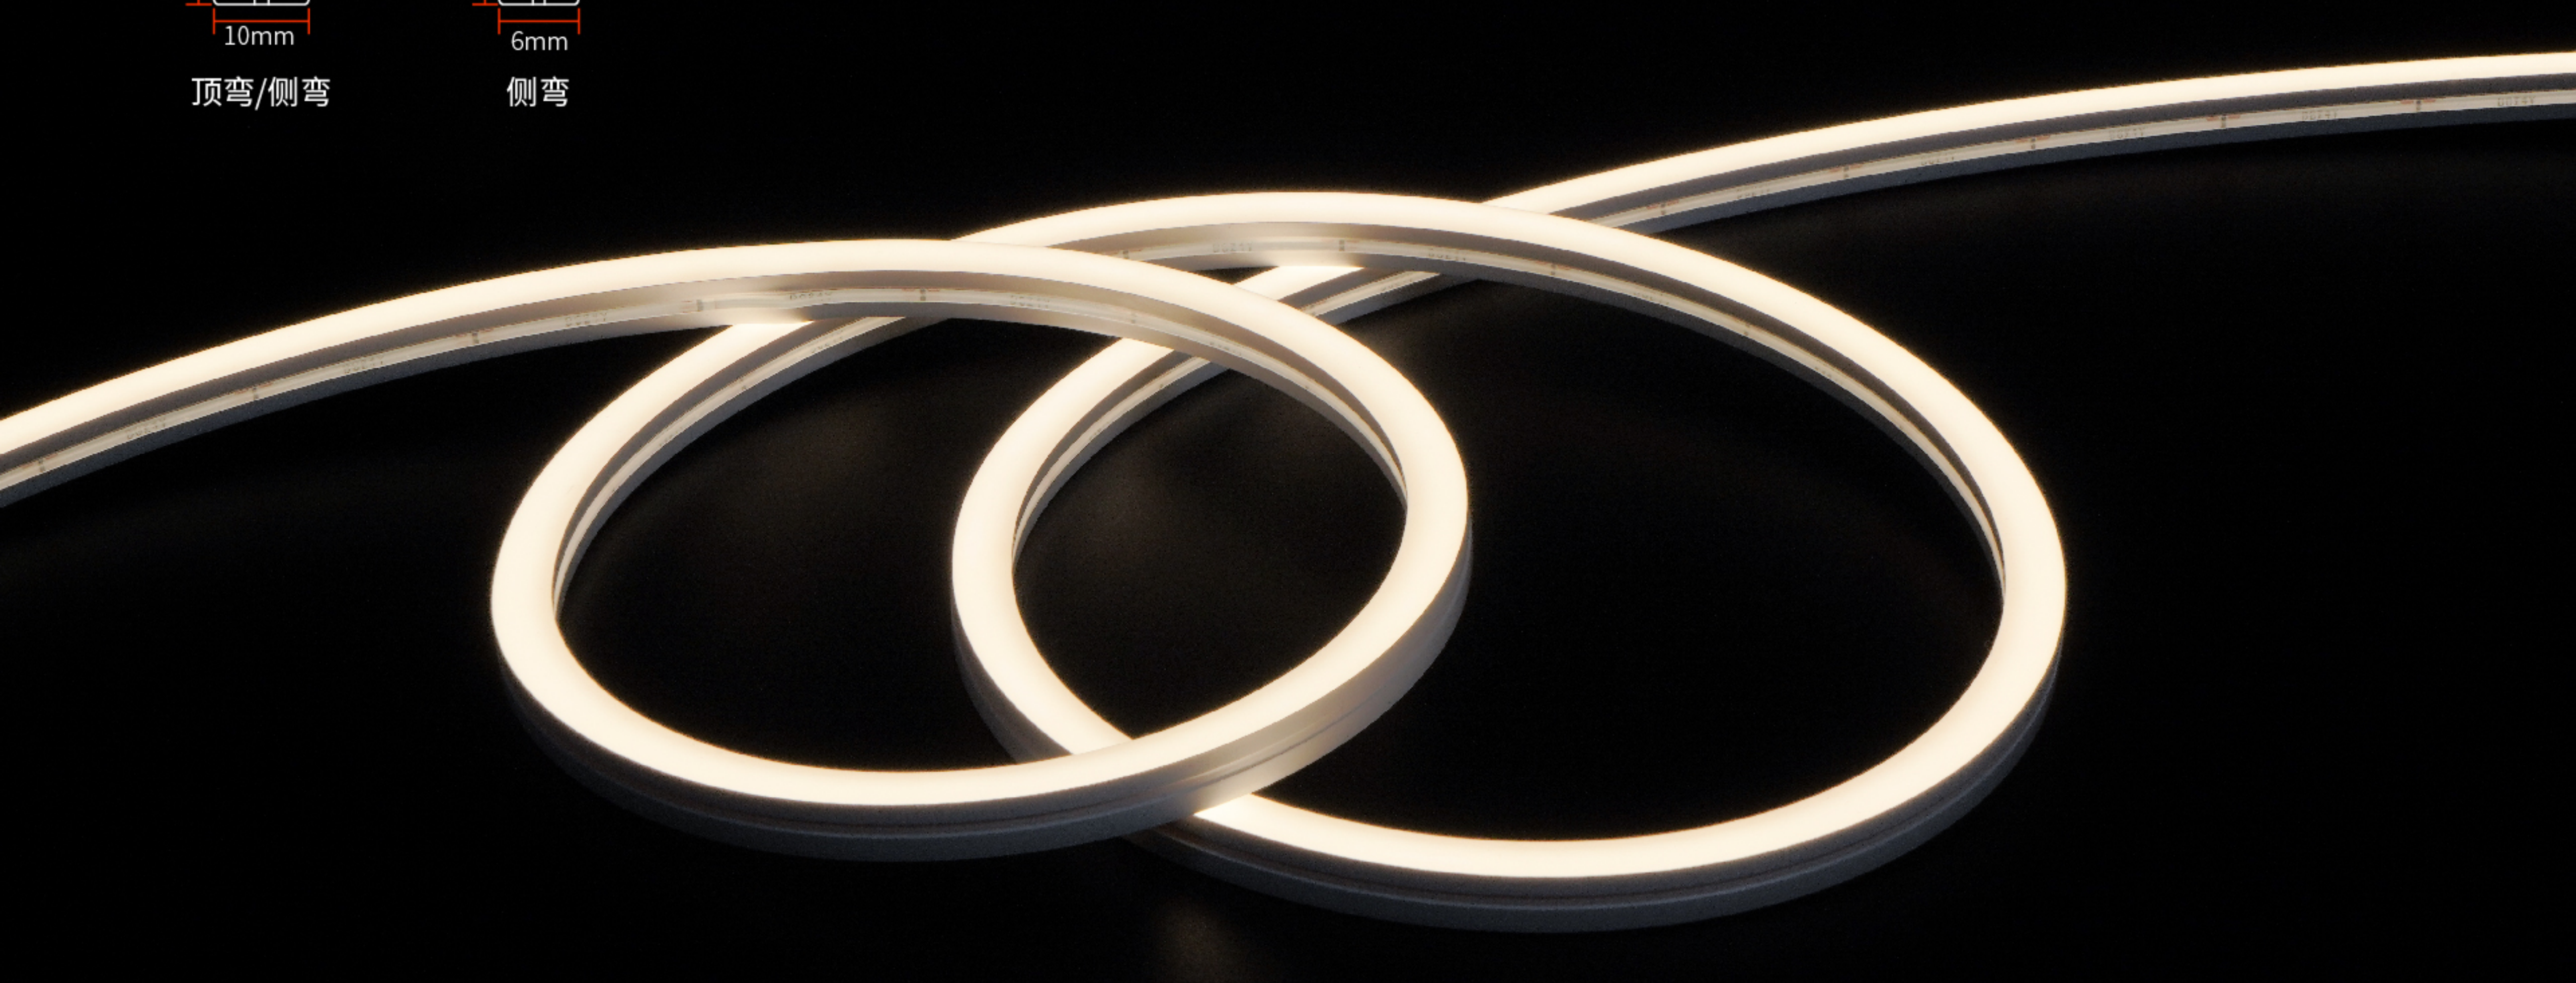


NJ系列 轮廓勾勒霓虹


NJS1010(T) NJT1010(T) NJS0612(T)

顶弯/侧弯勾勒霓虹
三色挤出工艺
产品系列化

10x10mm & 6x12mm
适用于室内勾勒照明

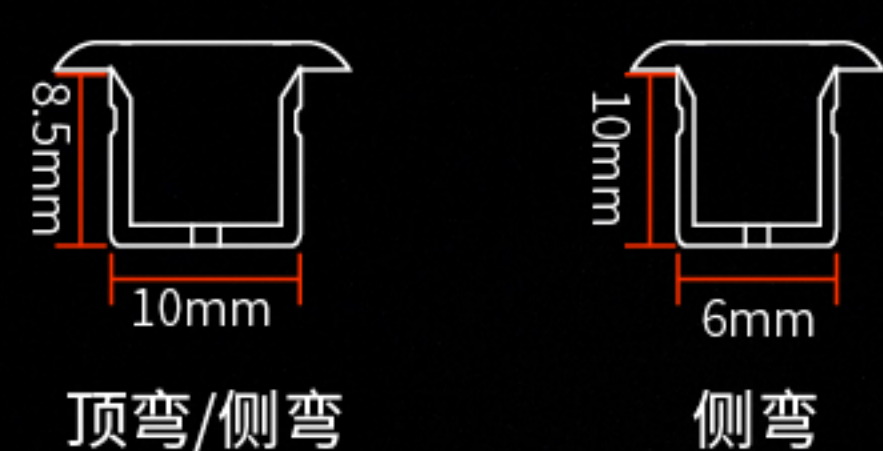


三色挤出工艺
裁剪线明显, 便于裁切

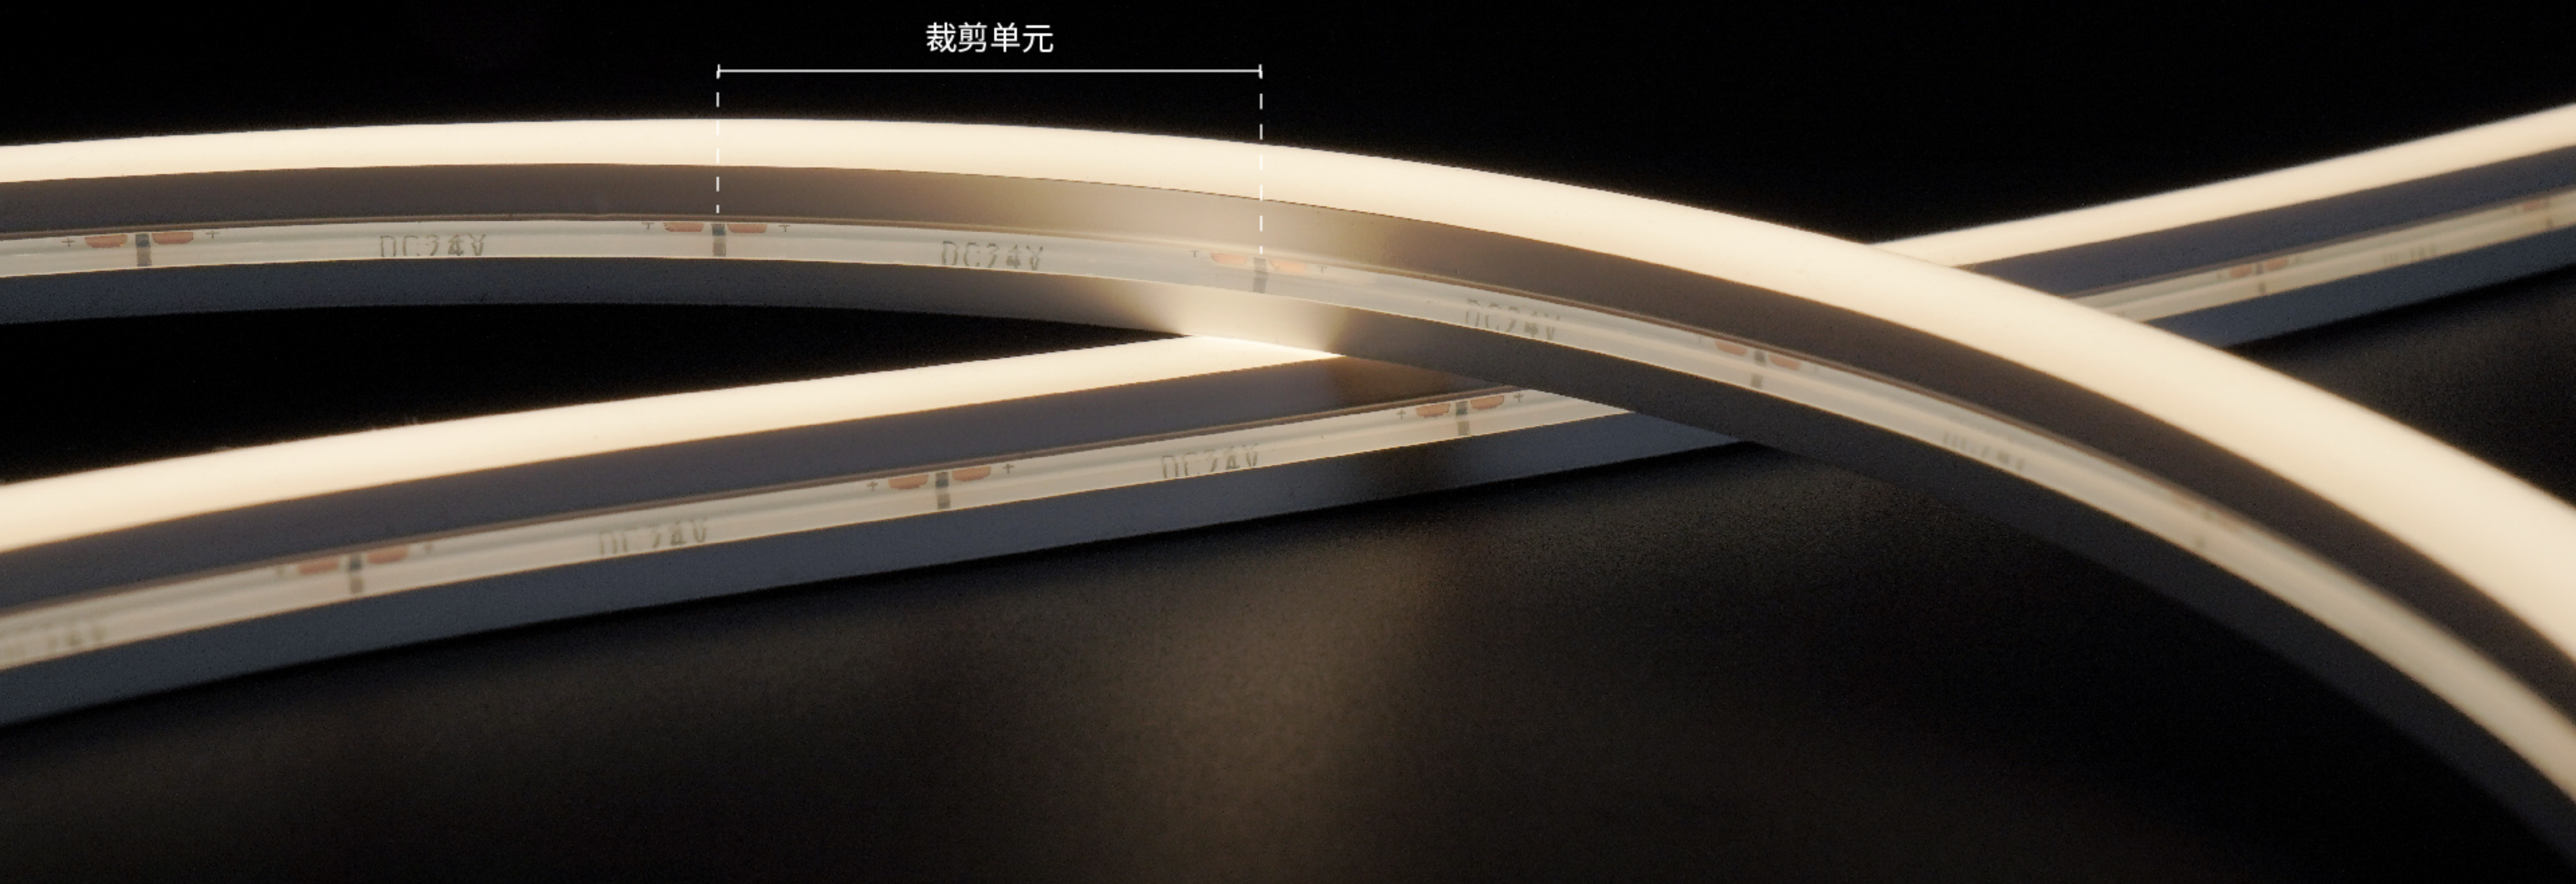

产品系列



顶弯

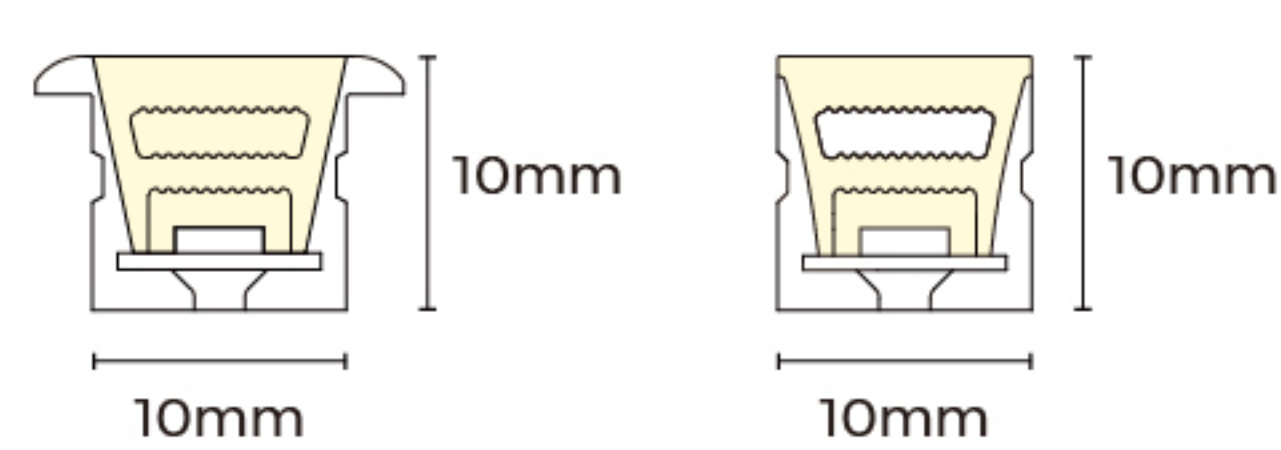


NJT1010T

NJT1010



侧弯

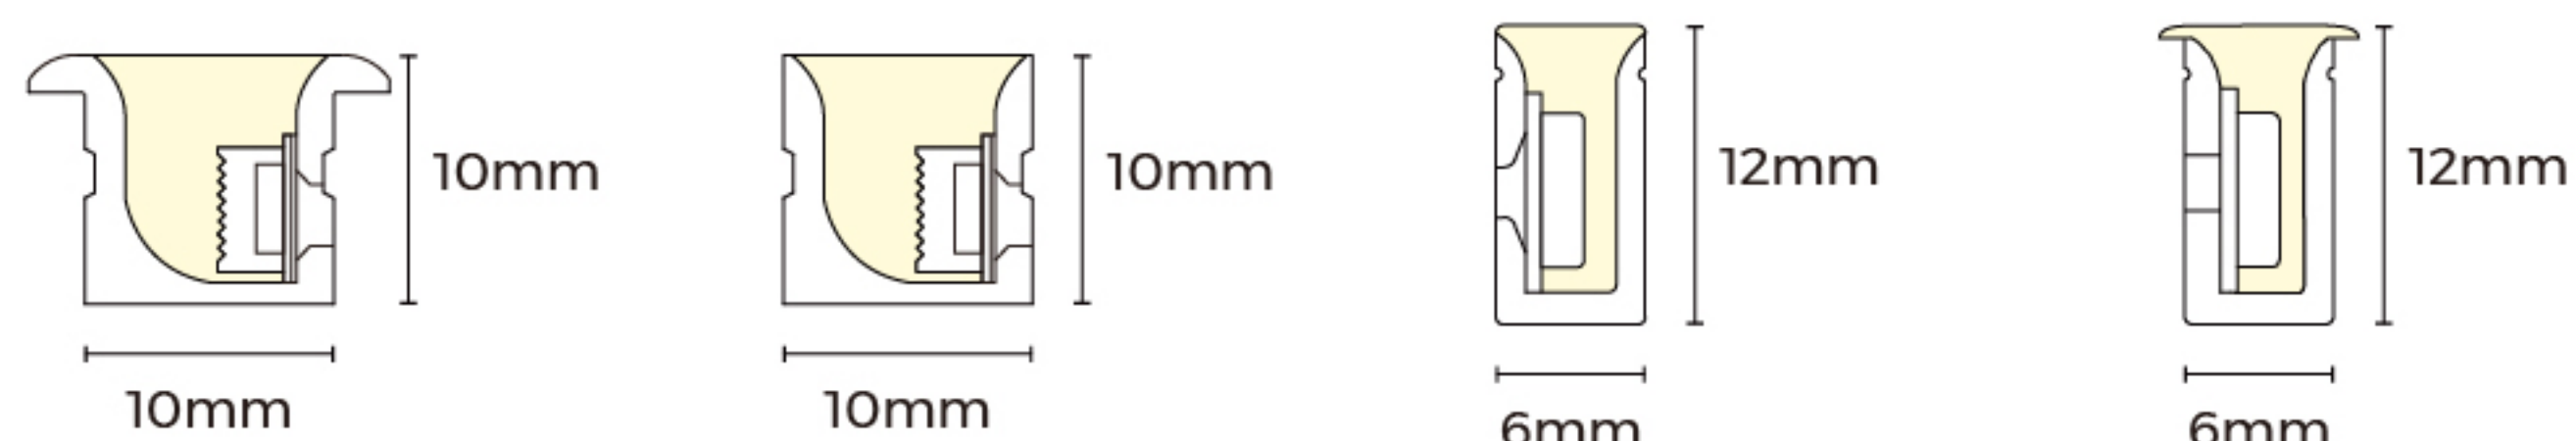


NJS1010T

NJS1010

NJS0612


NJS0612T

产品配件

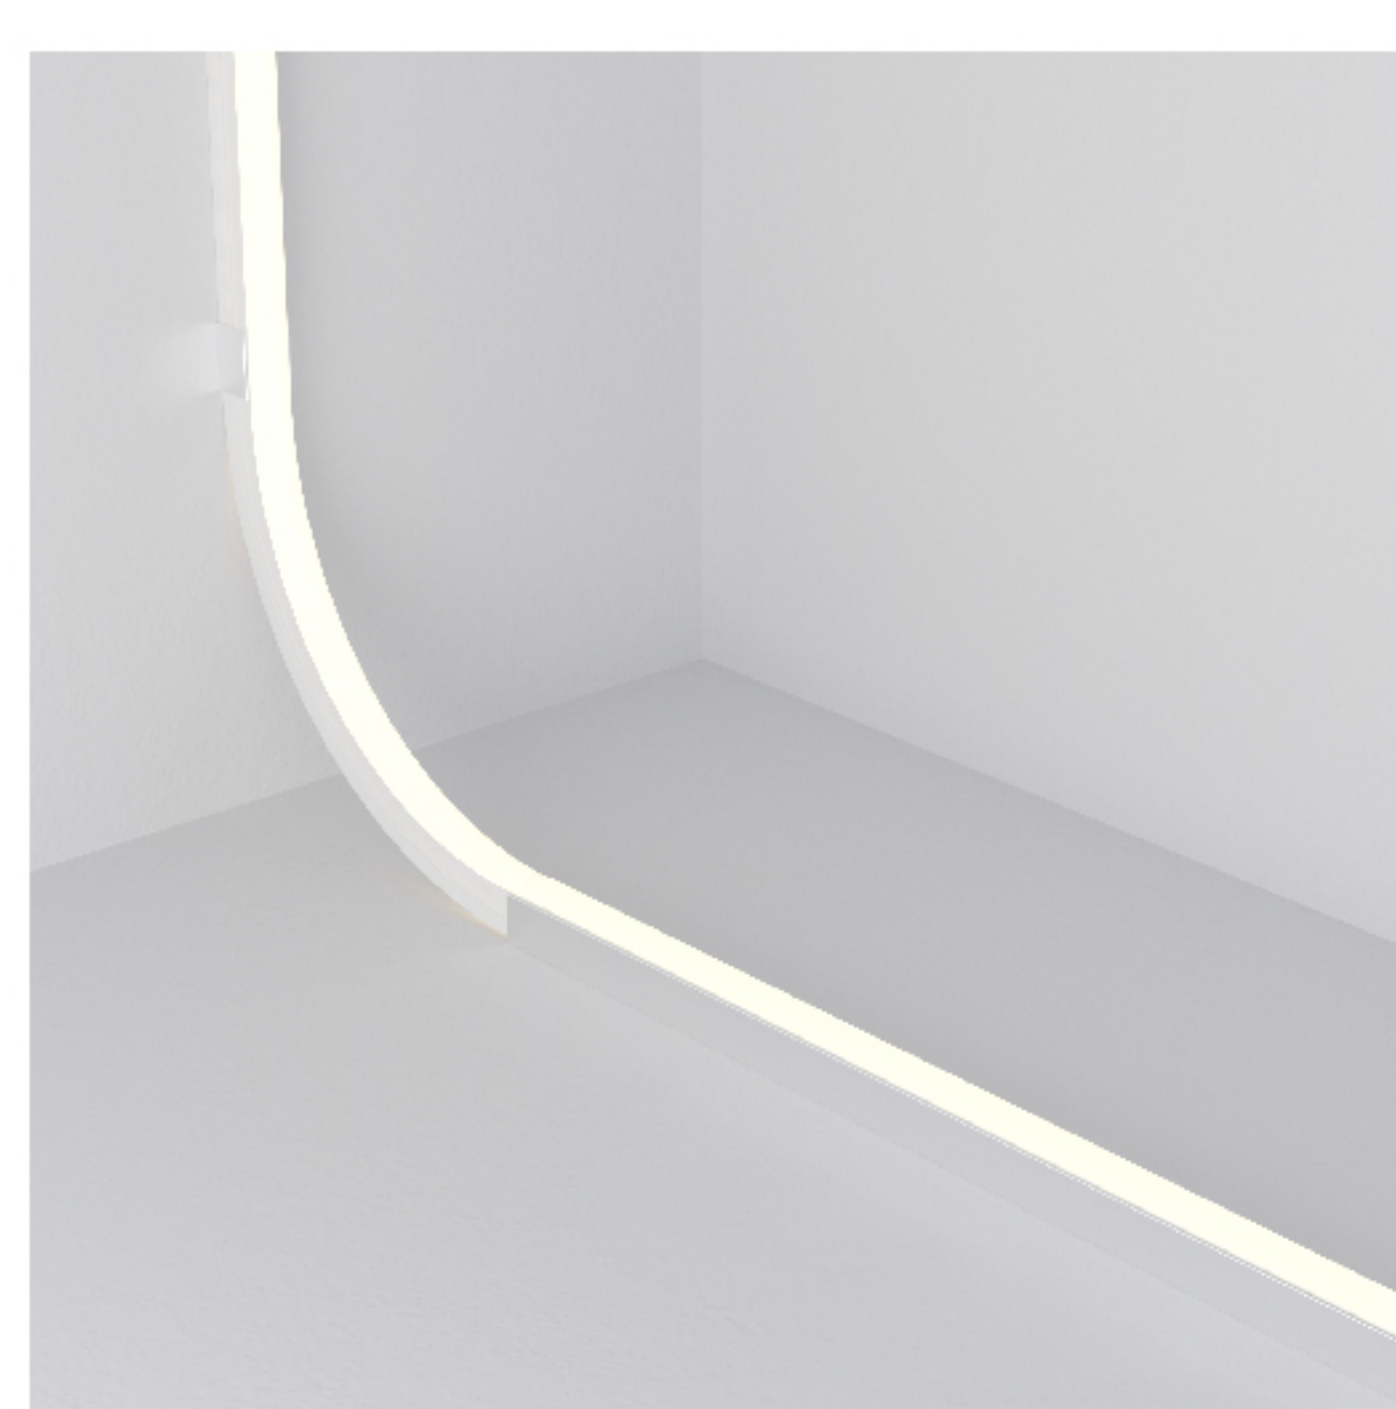


NJT1010(T)

铝槽
铝卡子

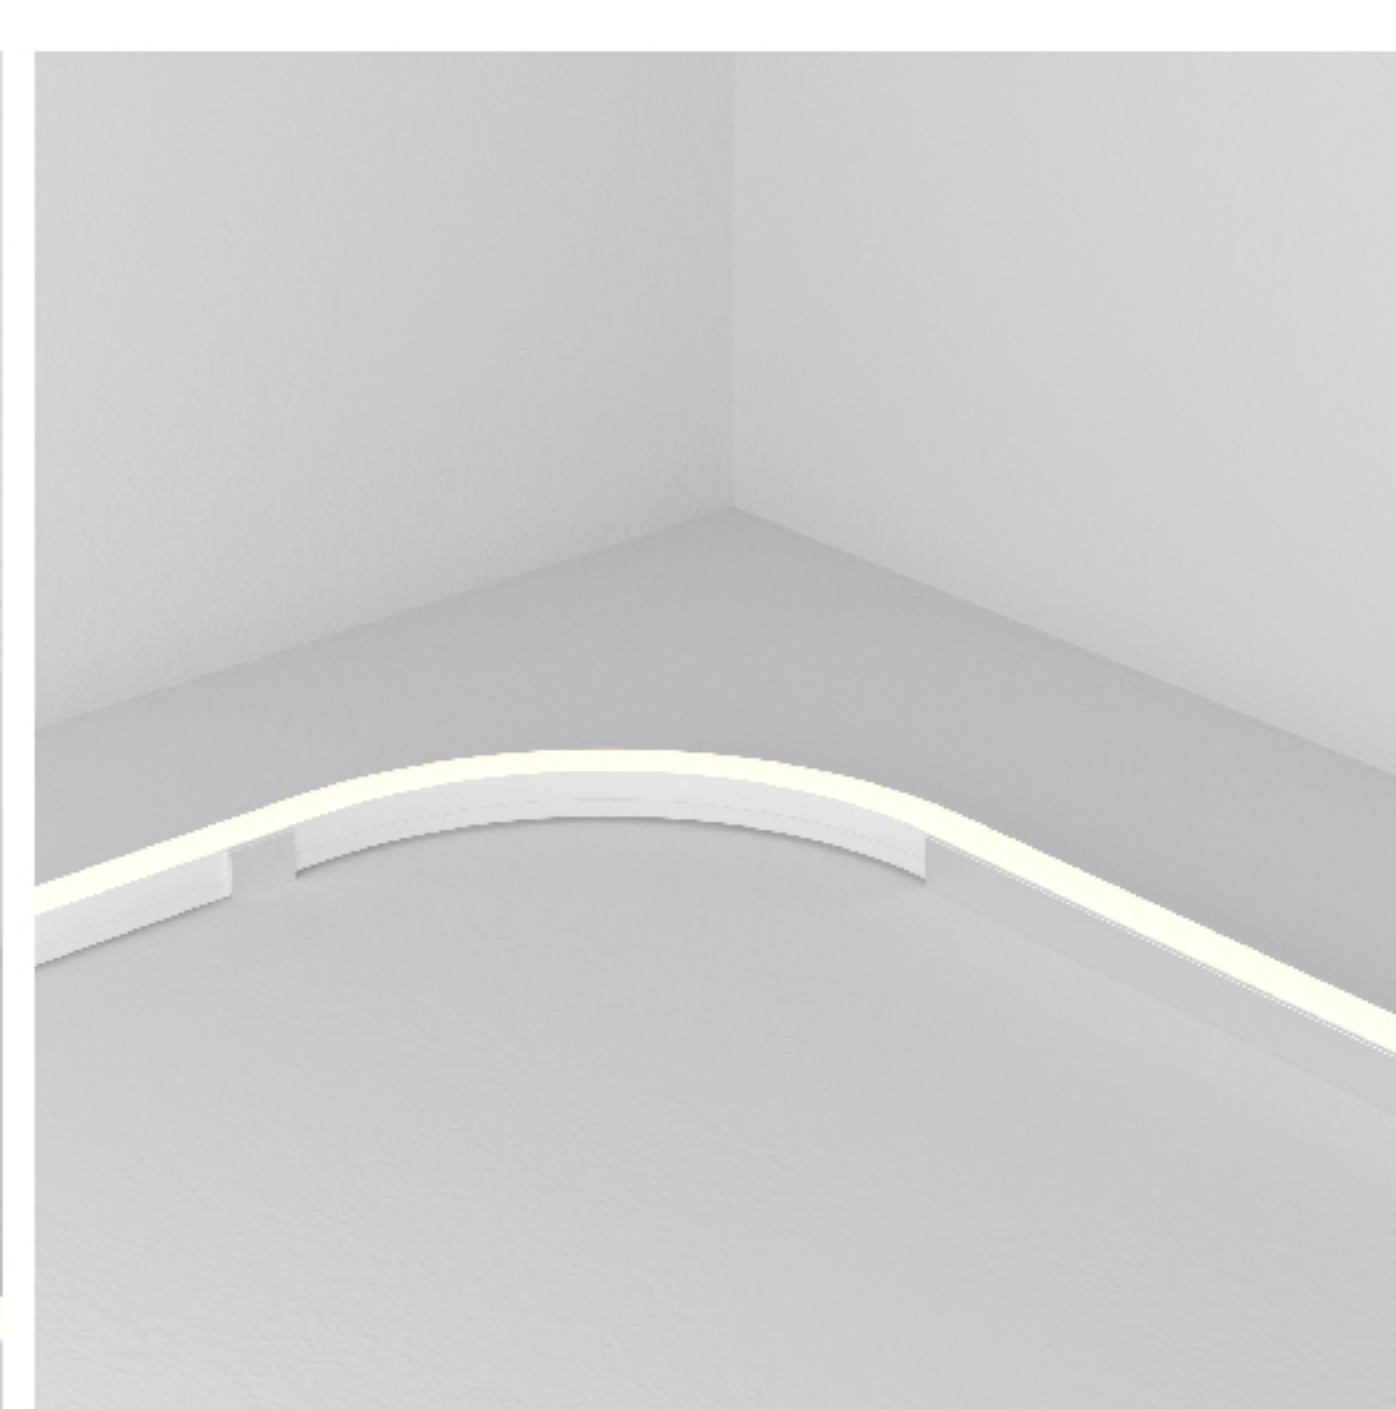

NJS1010(T)

铝槽
铝卡子

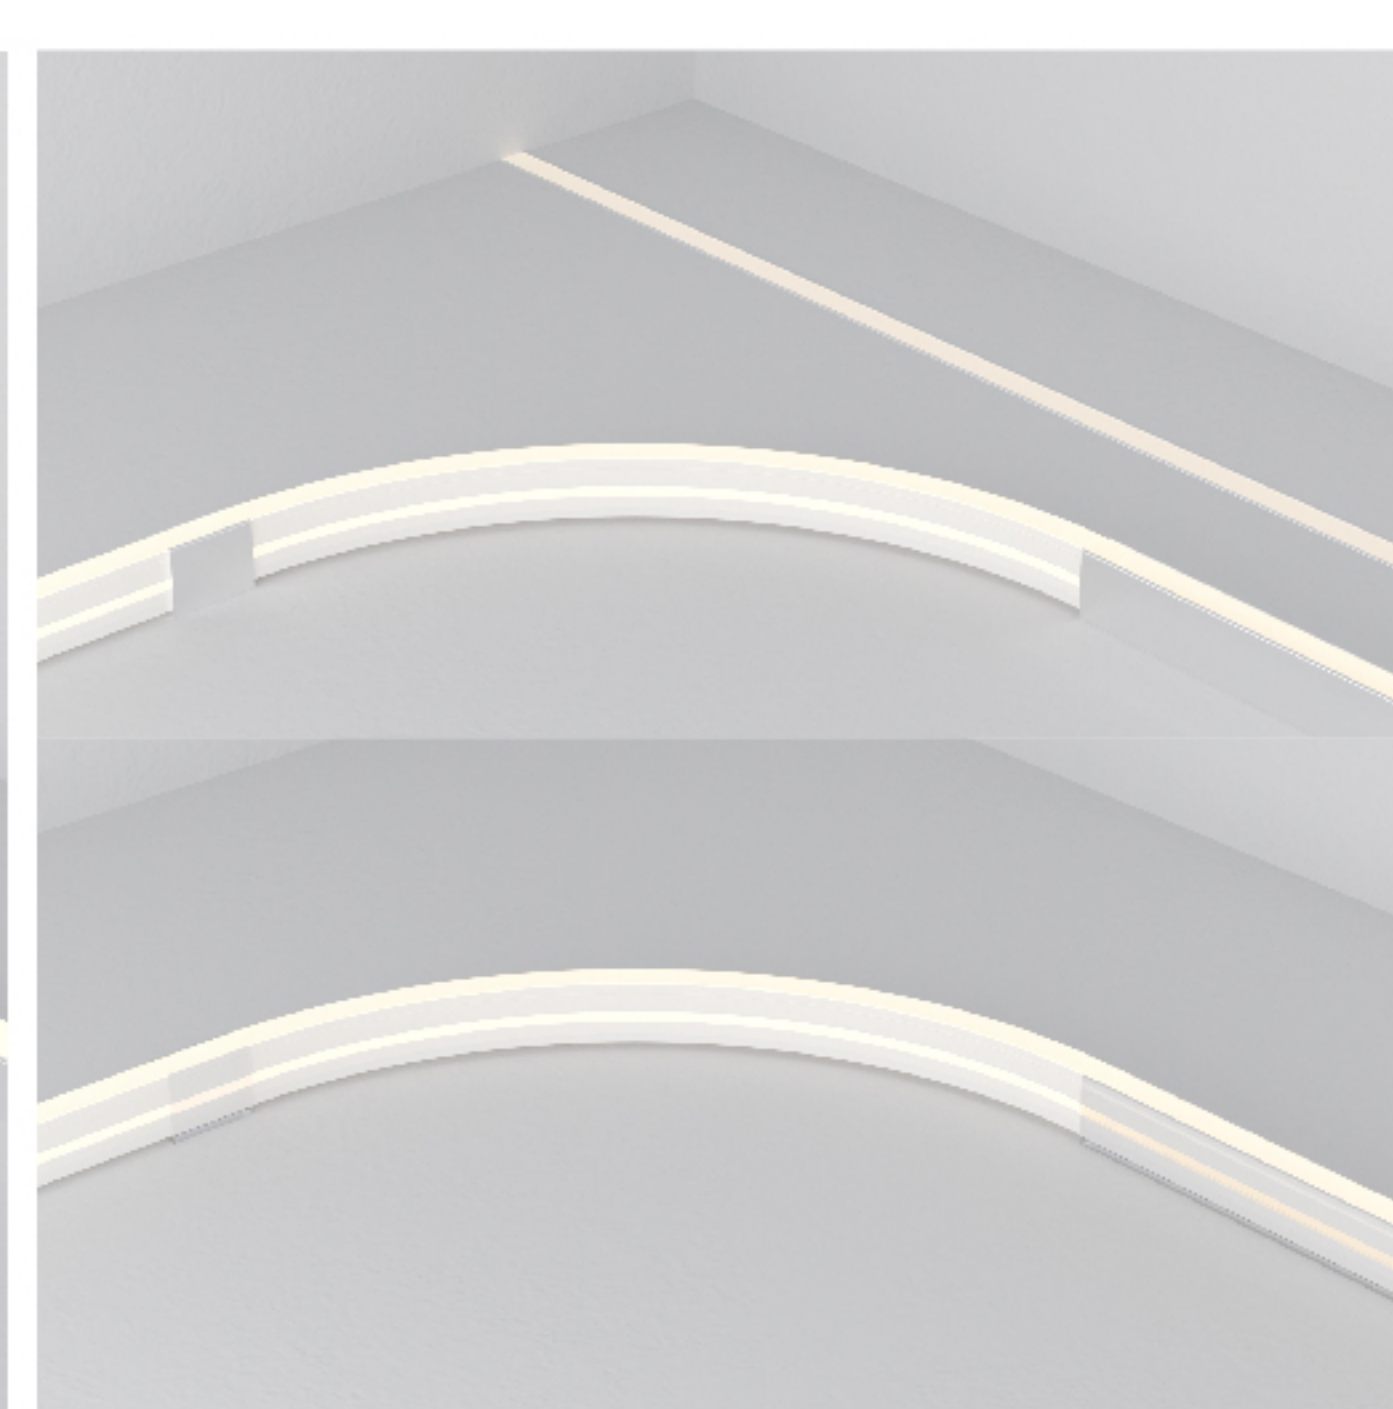

NJS0612(T)

铝槽
铝卡子
预埋铝槽
PC槽
PC卡子

应用案例



NJS1010(T)

色温: 2700K 3000K 3500K 5200K

裁剪单元: 6LEDs/38.46mm

输入电压: 24V

典型功率: 8.8W/m

流明: 560LM/m



NJT1010(T)

色温: 2700K 3000K 4000K 5500K

裁剪单元: 6LEDs/50mm

输入电压: 24V

典型功率: 8.8W/m

流明: 710LM/m

NJS0612(T)

色温: 2700K 3000K 3700K 5200K

裁剪单元: 6LEDs/50mm

输入电压: 24V

典型功率: 8.8W/m

流明: 330LM/m