



高压灯带

H852-230V-12mm
H8104-230V-12mm



无需电源，即插既亮

选配插头，即买即用



环保硅胶材质

硅胶绝缘保护，耐高温，耐黄变，
散热好，防护可达IP65




集成电路设计

抗电压波动，首尾亮度一致
3年质保



解决方案

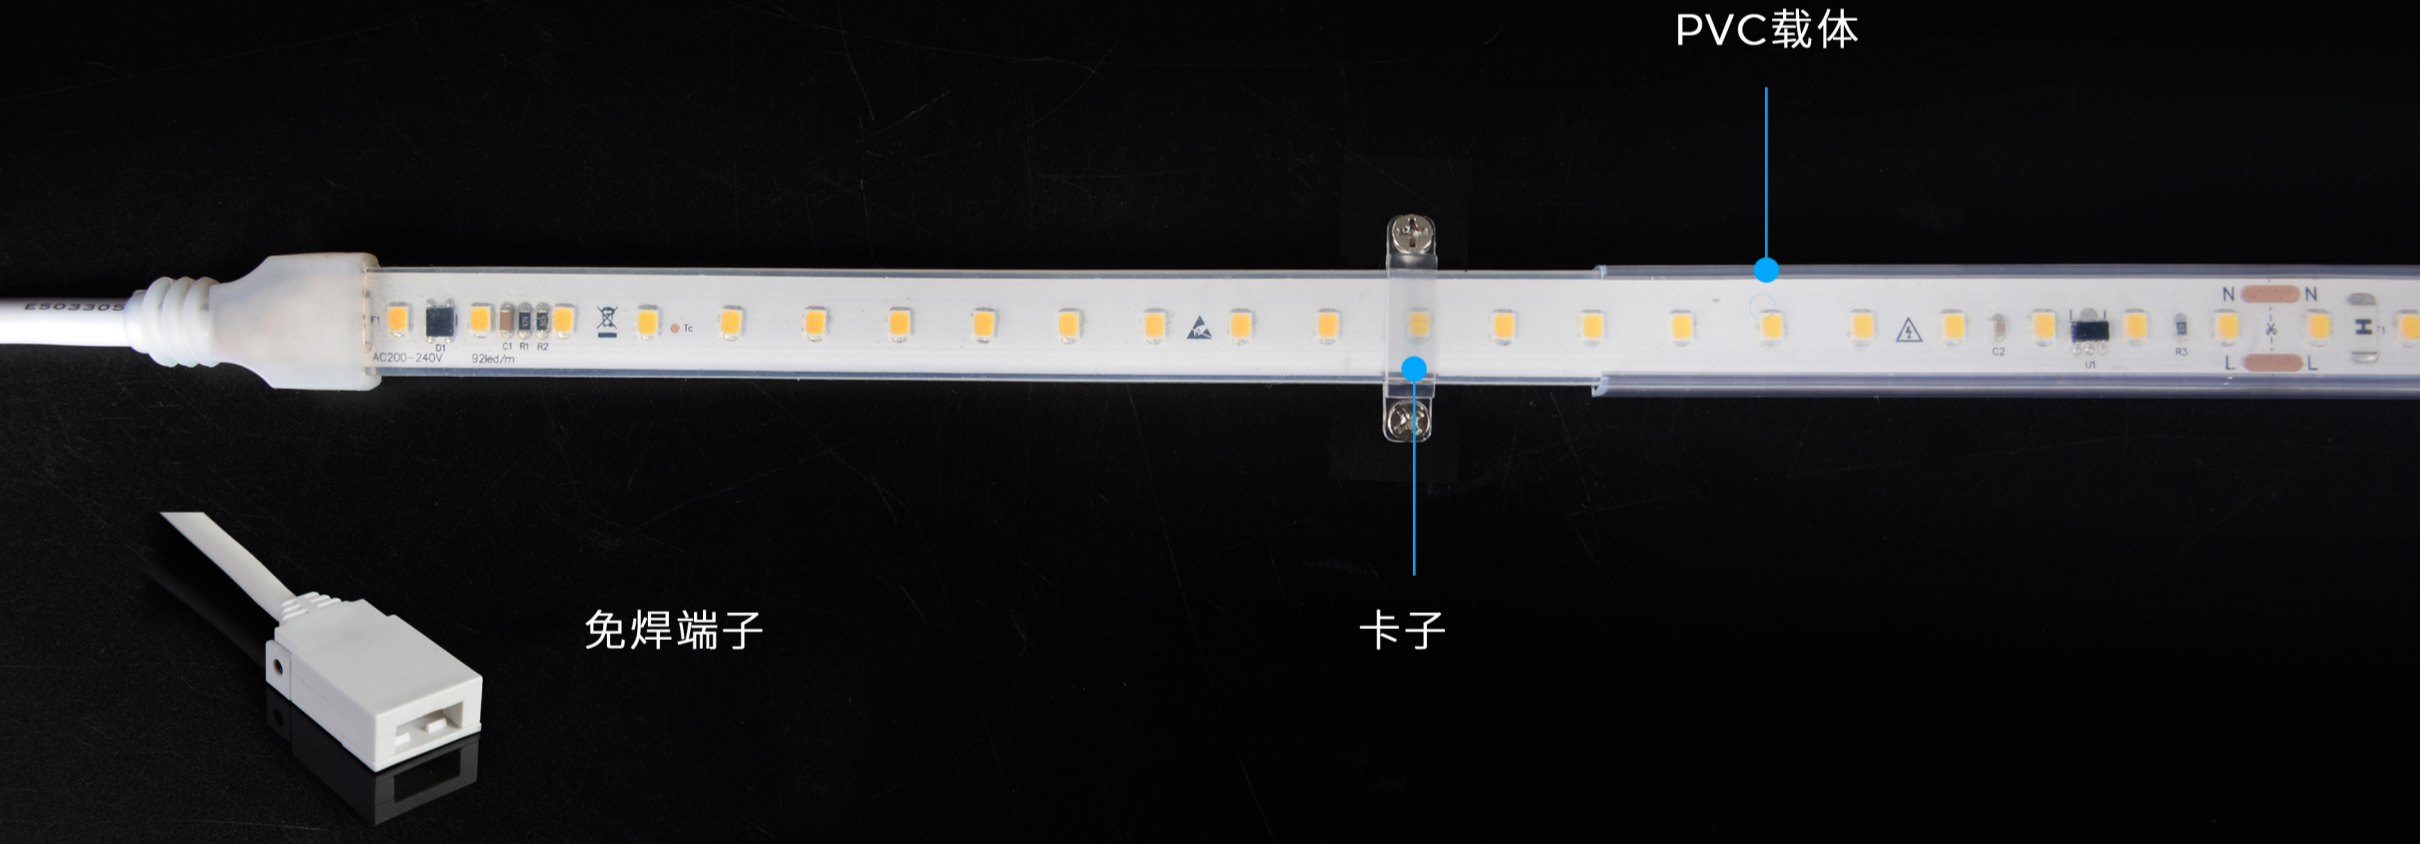

应用场景



产品参数

型号	每米灯珠	输入电压	图示	最小裁剪	板宽 (mm)	色温/颜色	典型功率 (W/m)	流明	显指	防护工艺
H8104-230V-12mm	104	220-240V AC 50/60Hz		26/250mm	12	2800 K 2800 K 5700 K	12	1100	80	IP65
H852-230V-12mm	52	220-240V AC 50/60Hz		26/500mm	12	2800 K 2800 K 4000 K 5700 K	6	550	80	IP65