

HERE, A NEW STAR IS BLOOMING



新一代 LED 灯带 NEW  
倒装灯带  
星光系列



### 180°发光 倒装灯带

芯片直接固定在FPC上, 无镀银层, 不需要金线和支架, 安装和运输过程更可靠




**SO<sub>2</sub>** 抗硫化  
防水汽

### 卷对卷工艺

连续5m无拼接




### 可靠性测试

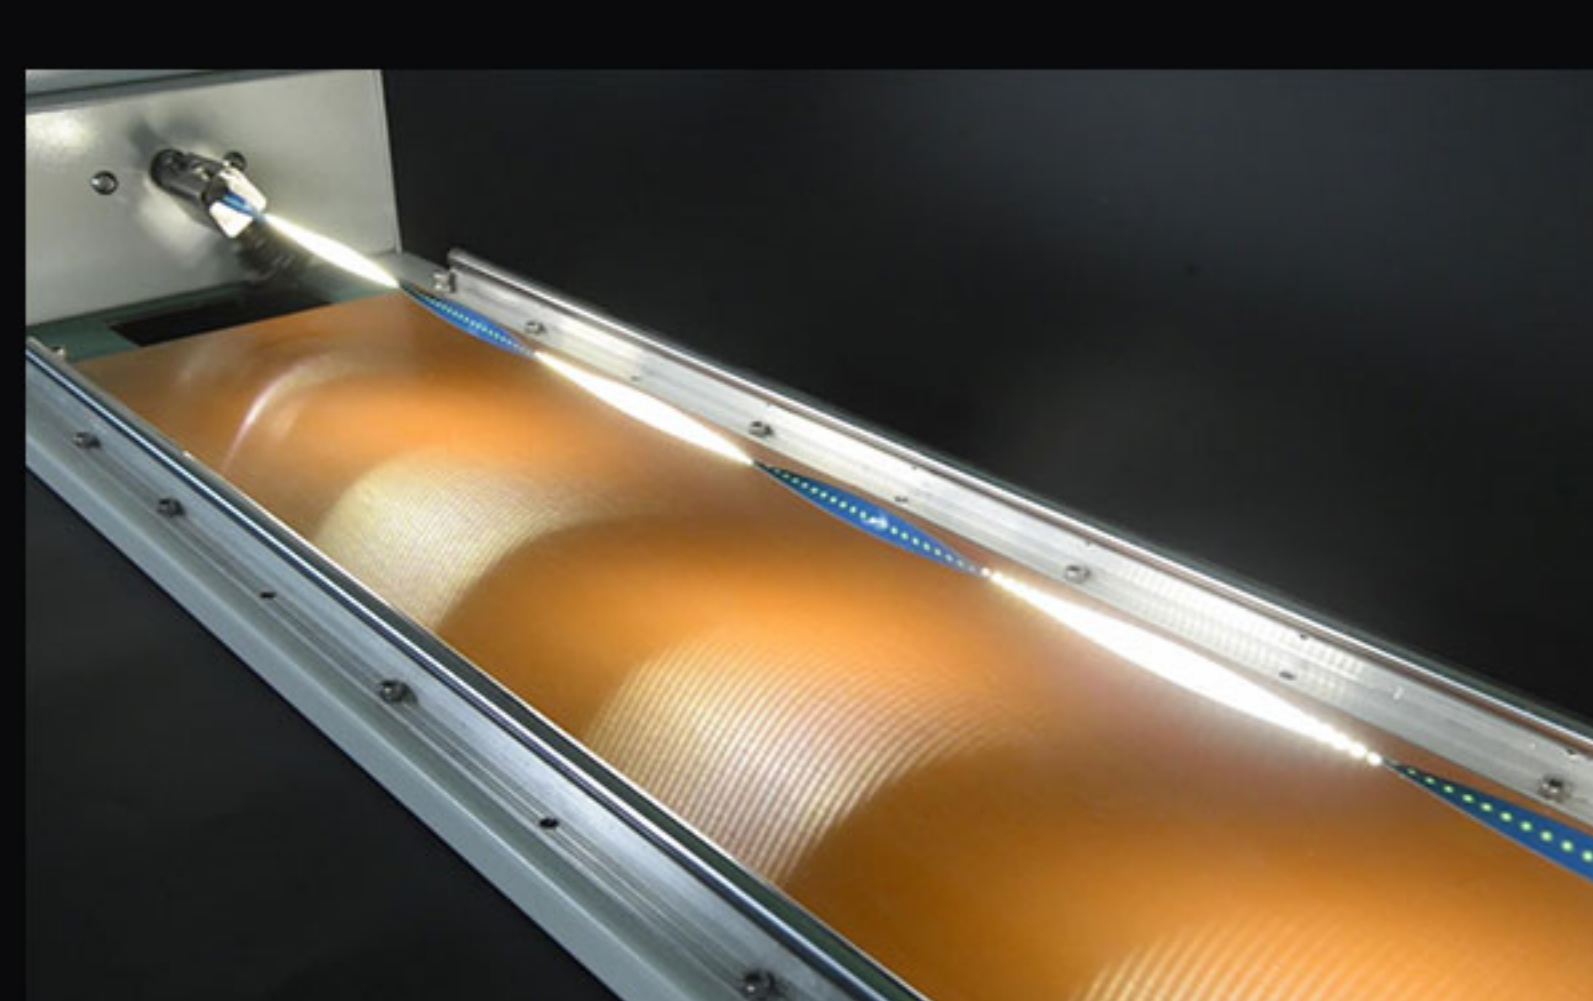

扭曲测试



缠绕测试

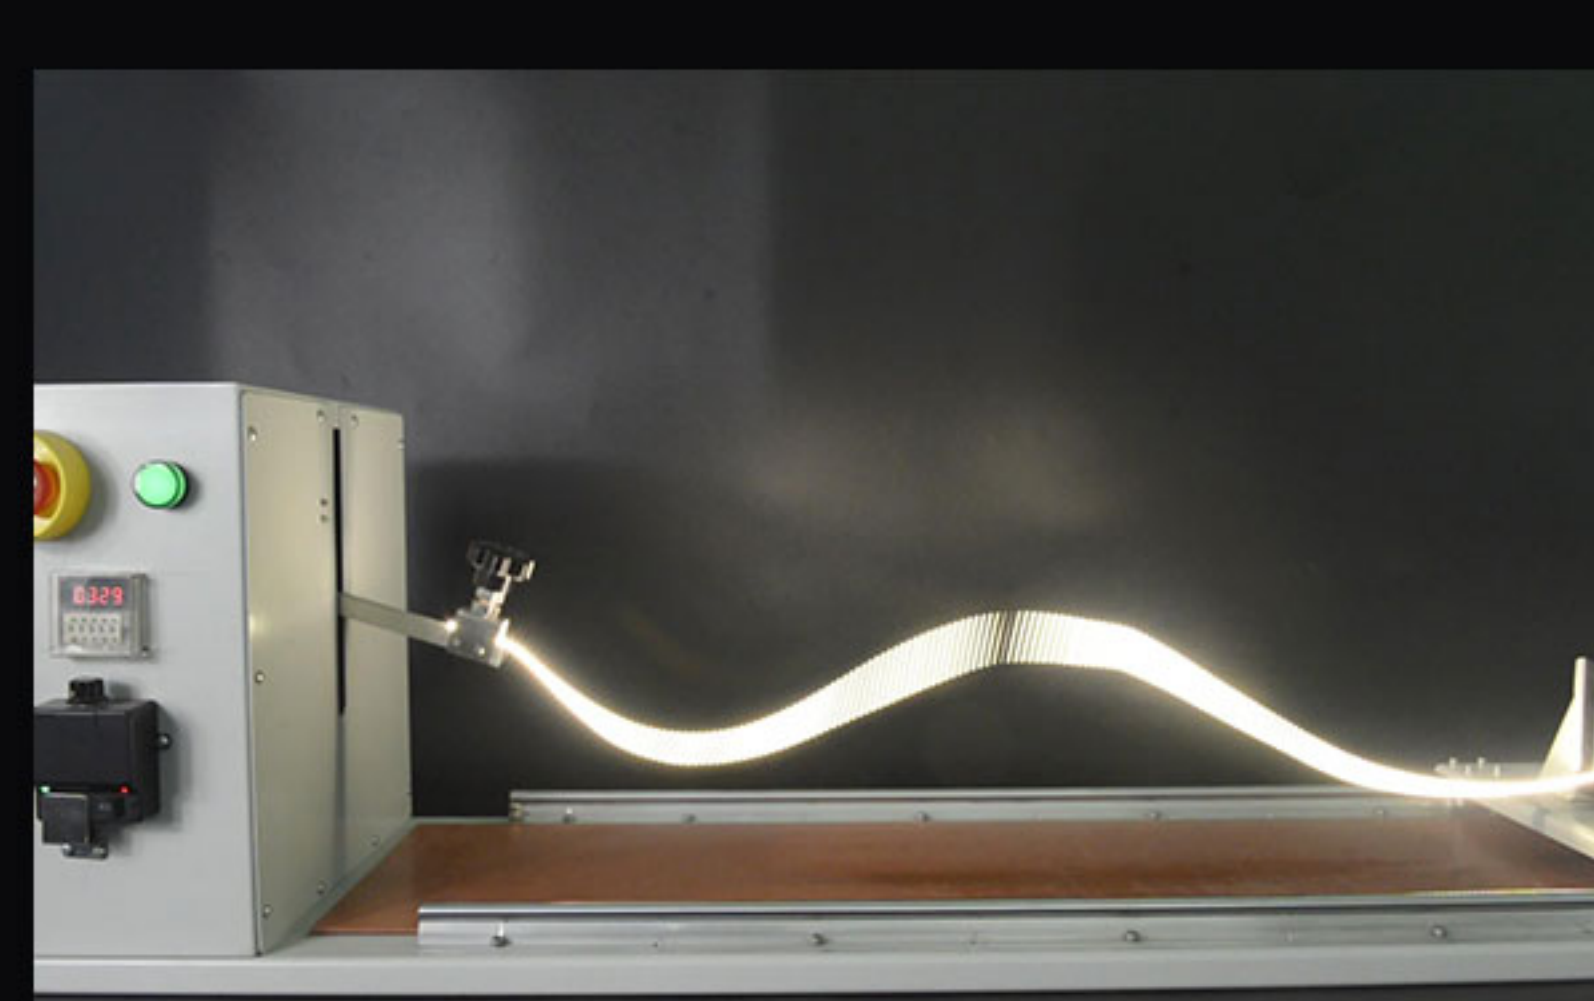


甩板测试



硫化测试



红墨水测试

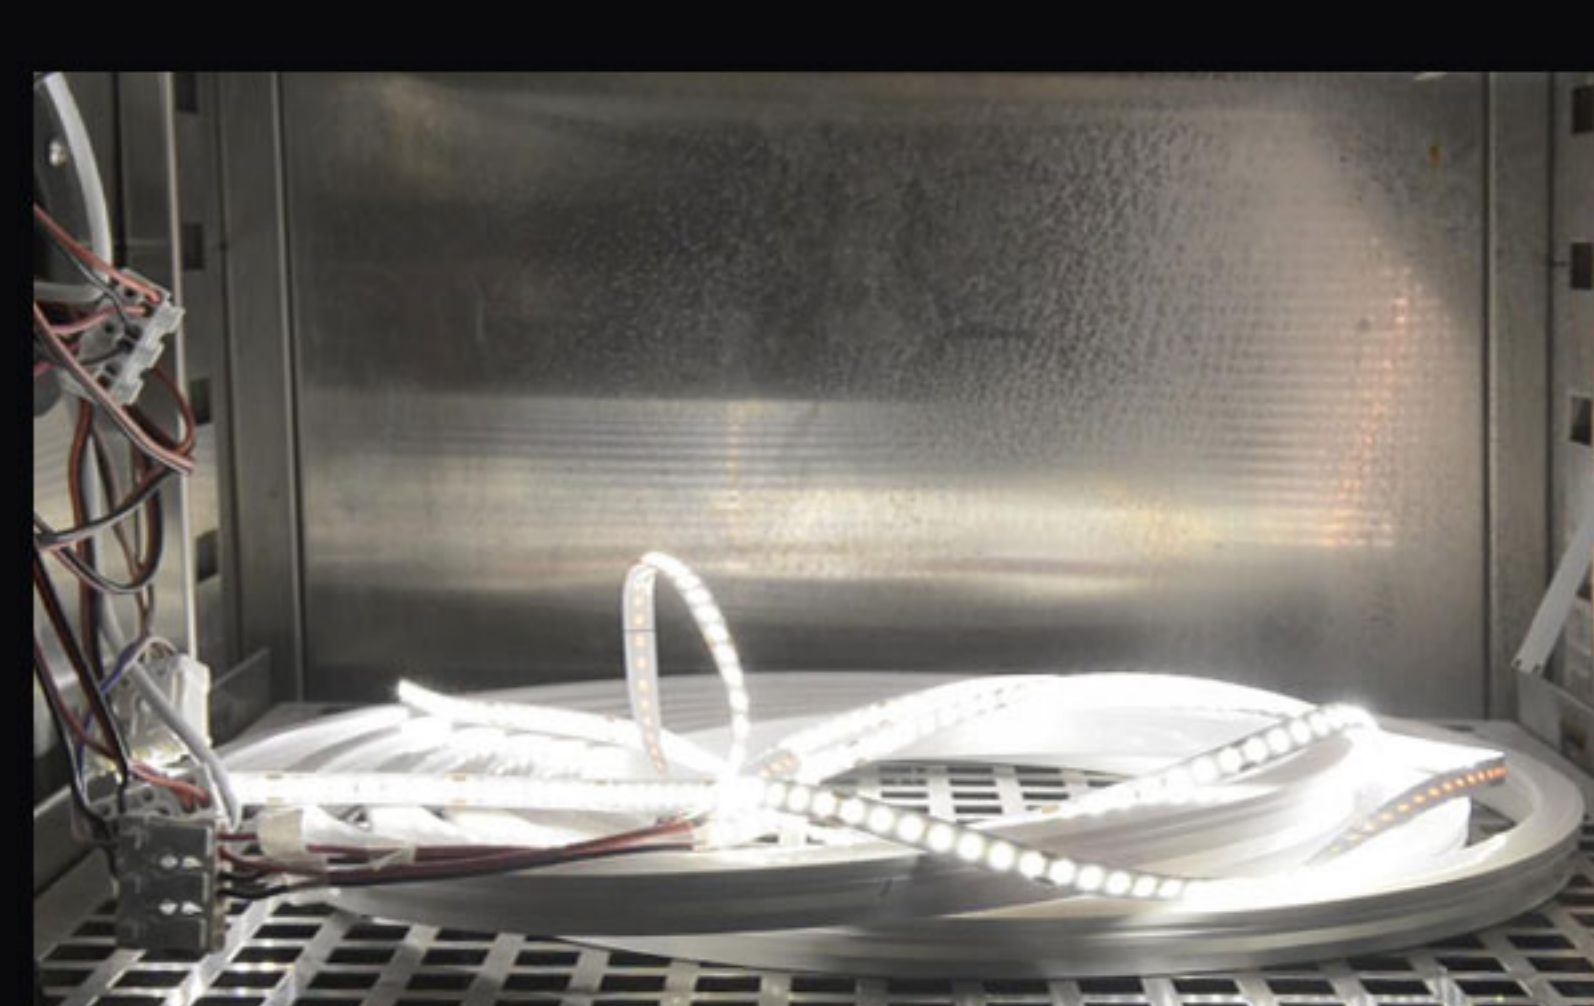

高温高湿测试

### 产品参数

| 型号           | 电压(V) | 板宽(mm) | 功率   | 色温(K)                       | 光通量/M | CRI | LEDs/m | 裁切(mm) | IP 防护     | 长度(M)              |
|--------------|-------|--------|------|-----------------------------|-------|-----|--------|--------|-----------|--------------------|
| FD64-24V-8   | 24    | 8      | 4.8  | 2700 K 3000 K 4000 K 6500 K | 510   | 80  | 64     | 125    | NO/NA/ETS | 5 (soldering-free) |
| FD128-24V-8  | 24    | 8      | 9.6  | 2700 K 3000 K 4000 K 6500 K | 1080  | 80  | 128    | 62.5   | NO/NA/ETS | 5 (soldering-free) |
| FD192-24V-10 | 24    | 10     | 14.4 | 2700 K 3000 K 4000 K 6500 K | 1520  | 80  | 192    | 41.66  | NO/NA/ETS | 5 (soldering-free) |